

# PIEZOELECTRIC ACCELEROMETER

## MODEL 1014A

- No External Power Required
- Frequency Response to 8 KHz
- Resonance Frequency at 20 KHz
- Top Connector
- Stud Mounted




actual size

### Description

The VIP Sensors Model 1014A is a stud mounted piezoelectric accelerometer designed for general vibration measurement on structures and objects. The sensor design is sealed against external contamination. The accelerometer is a self-generating device that requires no external power source for operation.


The Model 1014A exhibits high resonance frequency. Signal ground is connected to the outer case of the unit. When used with an isolated mounting stud, the accelerometer is electrically isolated from ground. The accelerometer features a 10-32 top connector that is used with low-noise coaxial cable for error-free operation.

VIP Sensors Signal Conditioner Models 5002 and 5005 are recommended for use with this high impedance accelerometer.

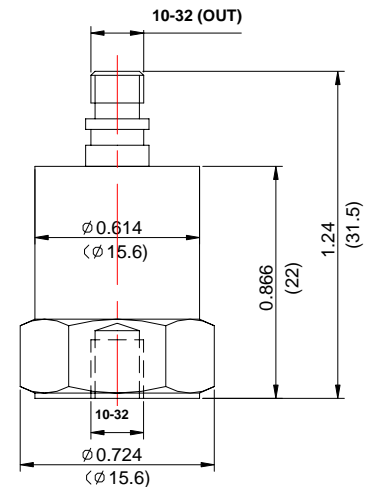


in (mm)

Typical Amplitude Response

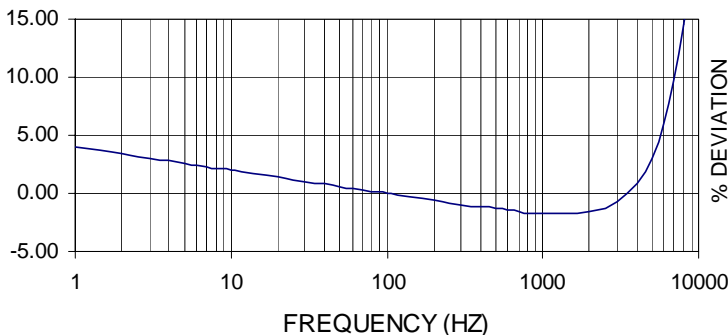

Typical Temperature Response

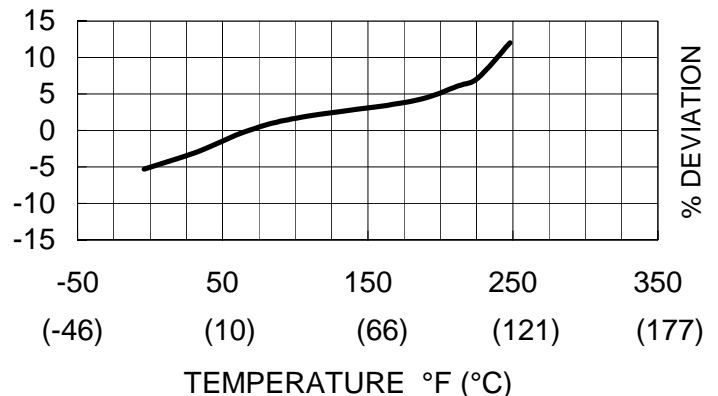

# PIEZOELECTRIC ACCELEROMETER

## MODEL 1014A

### SPECIFICATIONS

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C) and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.

	UNITS	
<b>DYNAMIC CHARACTERISTICS</b>		
Axial Sensitivity	pC/g	35 (30 minimum)
Transverse Sensitivity	%	≤ 5
Frequency Response		See Typical Amplitude Response
Resonance Frequency	Hz	20,000
Amplitude Response [1]		
± 5 %	Hz	1 – 5,000
± 1 dB	Hz	0.5 – 8,000
Temperature Response		See Typical Temperature Response
Amplitude Linearity	%	< 1
<b>ELECTRICAL CHARACTERISTICS</b>		
Output Polarity		Acceleration directed from the base into the transducer is defined as positive
Resistance	GΩ	>1
Capacitance	pF	1,200
Grounding		Signal ground connected to case
<b>ENVIRONMENTAL CHARACTERISTICS</b>		
Temperature Range		-4°F to 248°F (-20°C to +120°C)
Humidity		Epoxy sealed
Shock Limit	g pk	800
Base Strain	equiv. g pk/μ strain	0.00022
Magnetic Field Sensitivity	equiv. g rms/gauss (T)	2E-5 (2)
Thermal Transient Sensitivity	equiv. g pk/°F (°C)	0.18 (0.1)
<b>PHYSICAL CHARACTERISTICS</b>		
Weight	oz (grams)	1.1 (30)
Case Material		Stainless Steel
Mounting		10-32, torque 2 N-m (18 lbf-in)
Piezoelectric Material		PZT-5
Structure		Center compression
Output Connector		10-32 receptacle, side mounting

### ACCESSORIES

**Included:**

9006-120 Cable, Low Noise 10-32/10-32, 10 ft (3.3 m)  
 9504-8 Mounting Stud 10-32/10-32

Calibration Certificate

**Optional:**

9505-8 Mounting Stud, Isolated 10-32/10-32  
 9604 Cable Adapter 10-32/10-32 (extend cable length)

### NOTES

1. Low end response of the transducer is a function of its electronics.